

T4-90A-R1-V2



Planar Array Antenna, 2300–2690 MHz, 90° HPBW, 1xIntRET

- For use in beamforming system, includes a calibration port
- Planar array antenna – 4 columns
- Single internal RET control for all four antenna arrays
- Optimized for software defined split six sector applications

Alternative products available:

T4-90A-R1-V6 Planar Array Antenna, 2300–2690 MHz, 90° HPBW, 1xIntRET

General Specifications

Antenna Type	Sector
Band	Single band
Calibration Connector Interface	N Female
Calibration Connector Quantity	1
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	PVC, UV resistant
Radiator Material	Low loss circuit board
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	8
RF Connector Quantity, mid band	0
RF Connector Quantity, low band	0
RF Connector Quantity, total	8

Remote Electrical Tilt (RET) Information

RET Hardware	CommRET v1
RET Interface	8-pin DIN Female 8-pin DIN Male


T4-90A-R1-V2

RET Interface, quantity	1 female 1 male
Input Voltage	10-30 Vdc
Internal Bias Tee	Cal Port
Internal RET	High band (1)
Power Consumption, idle state, maximum	1 W
Power Consumption, normal conditions, maximum	8 W
Protocol	3GPP/AISG 2.0 (Single RET)

Dimensions

Width	307 mm 12.087 in
Depth	118 mm 4.646 in
Length	1610 mm 63.386 in
Net Weight, without mounting kit	15.6 kg 34.392 lb
TDD Column Spacing	58 mm 2.283 in

Array Layout

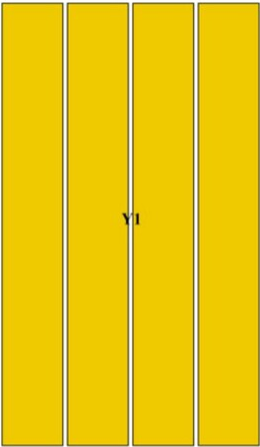

Array ID	Frequency (MHz)	RF Connector	RET (SRET)	AISG No.	AISG RET UID
Y1	2300-2690	1 - 8	1	AISG1	CPxxxxxxxxxxxxxxY1

(Sizes of colored boxes are not true depictions of array sizes)

Port Configuration

T4-90A-R1-V2



Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	2300 – 2690 MHz
Polarization	±45°

Electrical Specifications

Frequency Band, MHz	2300–2400	2496–2690
Beam Tilt, degrees	2–12	2–12
Coupling level, Amp, Antenna port to Cal port, dB	26	26
Coupling level, max Amp Δ, Antenna port to Cal port, dB	±2	±2
Coupler, max Amp Δ, Antenna port to Cal port, dB	0.9	0.9
Coupler, max Phase Δ, Antenna port to Cal port, degrees	7	7
Isolation, Cross Polarization, dB	24	24
Isolation, Co-polarization, dB	20	20
VSWR Return loss, dB	1.5 14.0	1.5 14.0
PIM, 3rd Order, 2 x 20 W, dBc	150	150
Input Power per Port at 50°C, maximum, watts	150	150

Electrical Specifications, Broadcast 65°

T4-90A-R1-V2

Frequency Band, MHz	2300–2400	2496–2690
Gain, dBi	18.8	19.2
Beamwidth, Vertical, degrees	5	4.6
CPR at Boresight, dB	20	17
Front-to-Back Total Power at $180^\circ \pm 30^\circ$, dB	32	32
USLS (First Lobe), dB	19	17

Electrical Specifications, Service Beam

Frequency Band, MHz	2300–2400	2496–2690
Steered 0° Gain, dBi	21.9	22.3
Steered 0° Gain Tolerance, dBi	± 0.4	± 0.6
Steered 0° Beamwidth, Horizontal, degrees	27	26
Steered 0° CPR at Beampeak, dB	24	20
Steered 0° Front-to-Back Total Power at $180^\circ \pm 30^\circ$, dB	35	35
Steered 30° Gain, dBi	21	21.4
Steered 30° Gain Tolerance, dBi	± 0.5	± 0.7
Steered 30° Beamwidth, Horizontal, degrees	30	28
Steered 30° CPR at Beampeak, dB	20	19
Steered 30° Front-to-Back Total Power at $180^\circ \pm 30^\circ$, dB	32	33

Electrical Specifications, Single Column

Frequency Band, MHz	2300–2400	2496–2690
Gain, dBi	16.4	16.4
Beamwidth, Horizontal, degrees	90	90
Beamwidth, Vertical, degrees	5.1	4.7
Beamwidth, Vertical Tolerance, degrees	± 0.2	± 0.3
CPR at Sector, dB	11	8

Electrical Specifications, Soft Split

Frequency Band, MHz	2300–2400	2496–2690
Gain, dBi	20.8	21.1
Beamwidth, Horizontal, degrees	35	33
CPR at Beampeak, dB	22	20
Front-to-Back Total Power at $180^\circ \pm 30^\circ$, dB	32	31

Mechanical Specifications

Wind Loading @ Velocity, frontal	586.0 N @ 150 km/h (131.7 lbf @ 150 km/h)
----------------------------------	---

T4-90A-R1-V2

Wind Loading @ Velocity, lateral	123.0 N @ 150 km/h (27.7 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	709.0 N @ 150 km/h (159.4 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

Packaging and Weights

Width, packed	413 mm 16.26 in
Depth, packed	257 mm 10.118 in
Length, packed	1740 mm 68.504 in
Weight, gross	25.5 kg 56.218 lb

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



Included Products

BSAMNT-3	– Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	--

* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
------------------	---