


E14F10P79

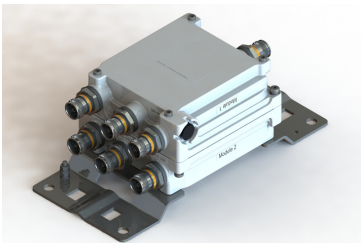

Ultra Compact Twin Triplexer 698-960/1350-1880/1920-2690, 4.3-10 connectors

- Ideal for small cell applications
- Compact form factor with reduced size and weight
- Suitable for space limited applications like Metro Cell, Lamp Pole, Concealment Solution and Macro Site
- New 4.3-10 connectors for improved PIM performance and size reduction
- Twin configuration
- dc/AISG pass-through on low frequency ports

Product Classification

Product Type	Triplexer
--------------	-----------

General Specifications


Color	Gray
Modularity	2-Twin
Mounting	Pole Wall
Mounting Pipe Hardware	Band clamps (2)
RF Connector Interface	4.3-10 Female

Dimensions

Height	88 mm 3.465 in
Width	138 mm 5.433 in
Depth	141.5 mm 5.571 in
Mounting Pipe Diameter Range	42.6–122 mm

Outline Drawing

E14F10P79

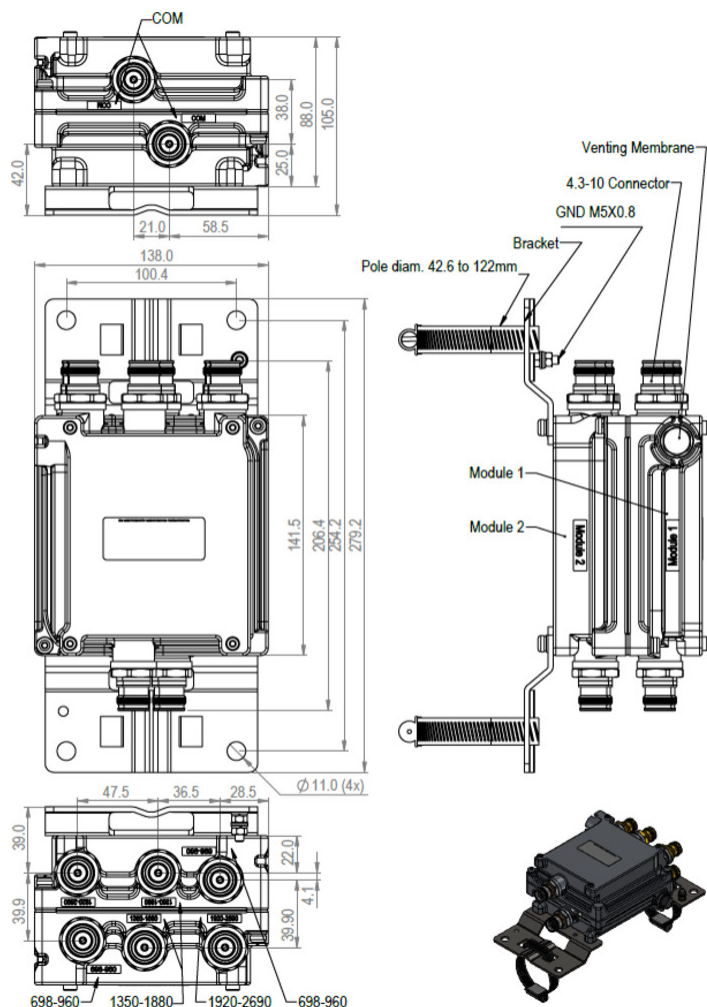

Electrical Specifications

Impedance	50 ohm
Electrical Specifications, dc Power/Alarm	
dc/AISG Pass-through Path	Branch 1
dc/AISG Pass-through, combiner	Branch 1
dc/AISG Pass-through, demultiplexer	Branch 1
Lightning Surge Current	5 kA
Lightning Surge Current Waveform	8/20 waveform


Electrical Specifications

Sub-module	1 2	1 2	1 2
------------	-------	-------	-------

E14F10P79

Branch	1	2	3
Port Designation	698-960	1350-1880	1920-2690
Electrical Specifications, Band Pass			
Frequency Range, MHz	698–960	1350–1880	1920–2690
Insertion Loss, typical, dB	0.1	0.25	0.2
Return Loss, typical, dB	22	22	22
Isolation, typical, dB	52	38	38
Input Power, RMS, maximum, W	100	100	100
Input Power, PEP, maximum, W	1000	1000	1000
3rd Order PIM, typical, dBc	-162	-162	-162
3rd Order PIM Test Method	Two +43 dBm carriers	Two +43 dBm carriers	Two +43 dBm carriers

Block Diagram

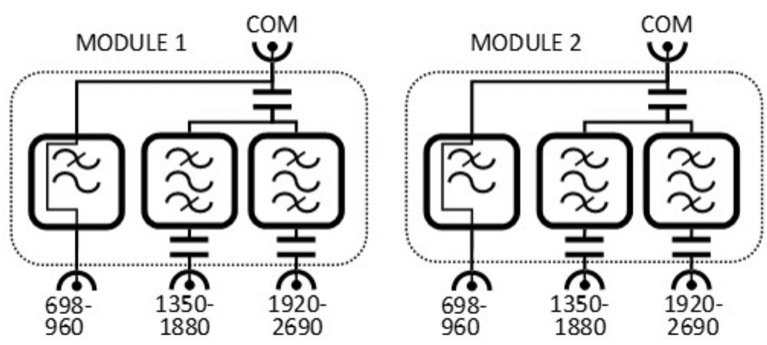

Environmental Specifications

Operating Temperature	-40 °C to +65 °C (-40 °F to +149 °F)
Corrosion Test Method	IEC 60068-2-11, 30 days
Environmental Test Method	ETSI EN 300 019-1-4
Ingress Protection Test Method	IEC 60529:2001, IP67

Packaging and Weights

Included	Mounting hardware
Volume	1.7 L
Weight, net	3 kg 6.614 lb
Weight, without mounting hardware	2.5 kg 5.512 lb