

F4-DMDM-D

Base Product



D-CLASS HELIAX® 1/2" Superflexible SureFlex® Jumper with interface types 7-16 DIN Male and 7-16 DIN Male

Product Classification

Product Type	Wireless transmission cable assembly
Product Brand	HELIAX® SureFlex®
Product Series	RSJ4-50

General Specifications

Body Style, Connector A	Straight
Body Style, Connector B	Straight
Interface, Connector A	7-16 DIN Male
Interface, Connector B	7-16 DIN Male
Specification Sheet Revision Level	A

Dimensions

Nominal Size	1/2 in
--------------	--------

Logo Image

F4-DMDM-D




Electrical Specifications

3rd Order IMD Dynamic	-116 dBm
3rd Order IMD Dynamic Test Method	Two +43 dBm carriers per IEC 62037
DTF, Connector A	-34 dB
DTF, Connector B	-34 dB

F4-DMDM-D

Ordering Tree

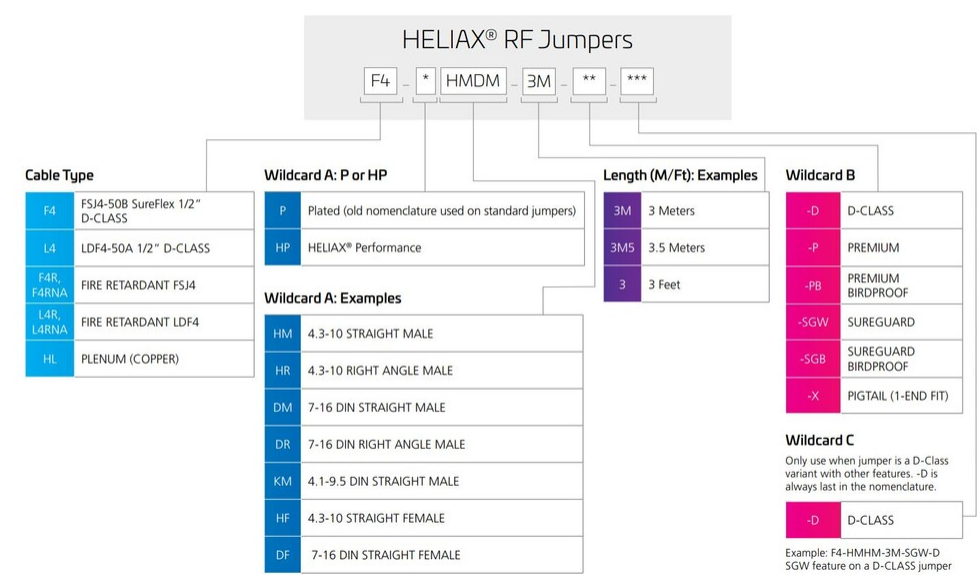

Electrical Performance

Frequency Band	RL (Length ≤ 6m)	VSWR (Length ≤ 6m)	RL (Length > 6m)	VSWR (Length > 6m)
698 – 970 MHz	30.00	1.070	26.40	1.110
1700 – 2200 MHz	30.00	1.070	26.40	1.110
2200 – 2700 MHz	26.00	1.110	24.00	1.140

Jumper Assembly Sample Label

F4-DMDM-D



Environmental Specifications

Immersion Test Method Meets IEC 60529:2001, IP68 in mated condition

Regulatory Compliance/Certifications

Agency	Classification
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system